



### SPECIAL FEATURES FTA600

- For natural ventilation, smoke and heat exhausting systems and ferralux® NRWG (EN12101-2)
- Type:
  - R – with role: The folding arm opens via role for air inlets at 90°
  - DF – with knuckle-joint for opening/closing of side hung inward opening windows at 90°
  - GF – with slide rail for opening/closing of side hung outward opening windows at 90°
- Opening time of 45 s for 90° opening angle
- Programmable voltage free contact
- Robust corrosion-resistant design
- Easy installation due to holes in the end caps of housing
- Programmable parameters of Internal Intelligent Control Electronics S12
  - Synchronised multi-operation and sequence control without add. devices
  - Electronic soft-start, soft-close and soft-stop at end of stroke control
  - Stroke, force, speed
  - Rebate control
- Integrated plug solution
- Suitable for M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives

For this product series, a Type III Environmental Product Declaration (EPD) was issued according to ISO 14025 and EN 15804.

The LCA results of the different product types are listed at the end of this product catalogue.

The EPD documents can be viewed or downloaded from our homepage [www.aumueller-gmbh.de](http://www.aumueller-gmbh.de).

FOLDING ARM DRIVES																	
Type	Form	Model		Stroke	Torque		Running time		Cut-off current	Use			Location		Functions		
		Type of cut-off	Rated voltage	Range	Opening torque	Closing torque	OPEN	CLOSE	Max.	Natural ventilation	RWA	NRWG	Facade	Roof	Run monitoring	Synchronised run	Sequence control
			[VDC]	[mm]	[Nm]	[Nm]	[mm/s]	[mm/s]	[A]								
FTA	FTA R	S12	24	0 – 93	215	215	45,0	45,0	1,4	●	●	●	●		●	●	●
	FTA DF					215				●	●	●	●		●	●	●
	FTA GF					215				●	●	●	●	■	●	●	●

#### LEGEND

● suitable    ■ not recommended

S12 internal intelligent cut-off switch for synchronised run and programmable functions




#### FTA600 R FOLDING ARM DRIVES

- Model 24V DC, S12
- Pulling/Pushing force 215 Nm / 215 Nm
- Stroke length (lever) 0 – 93 Degree
- Speed 2,0 Degree/s (45 s für 90°)
- Housing (WxH) 40 x 56 x 421 mm, aluminium
- Opening mechanism Lever arm 20 x 30 x 405 mm, aluminium
- Version Solo with roller for air inlets
- Protection rating IP32


## FTA600 R

#### INLET AIR

Floor-to-ceiling windows (FTA600 R)

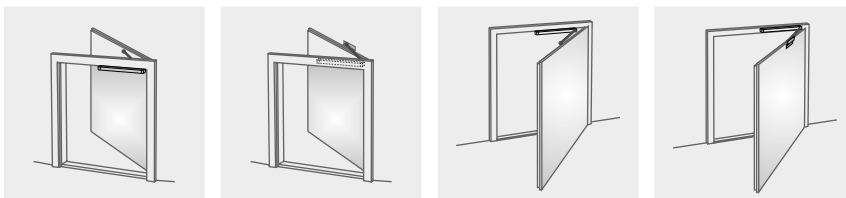

- Application: natural ventilation, RWA
  - Mainly for supply air openings
  - Internal Intelligent Control Electronics S12
  - Programmable contact for opener
  - Unified plug solution for all AUMÜLLER chain drives and AUMÜLLER folding arm drives
- Options*
- Programmable special functions
  - M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives (S3 / S12)
  - Various customised programmings on request

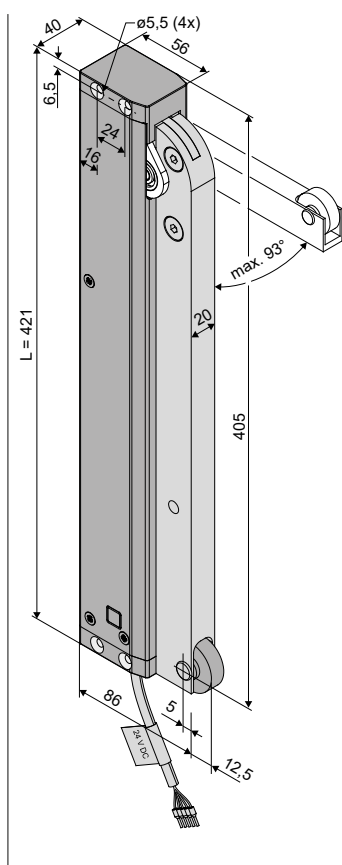



### TECHNICAL DATA

<b>U<sub>N</sub></b>	Rated voltage	24 V DC (19 V ... 28 V)
<b>I<sub>N</sub></b>	Rated current	1,0 A
<b>I<sub>A</sub></b>	Cut-off current	1,4 A
<b>P<sub>N</sub></b>	Rated power	24 W
<b>DC</b>	Duty cycle	5 cycles (ED 30 % - ON: 3 min./OFF: 7 min.)
	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +60 °C
<b>M<sub>A</sub></b>	Force (Torque) OPEN (max.)	600 N (~ 215 Nm)
<b>M<sub>Z</sub></b>	Force (Torque) CLOSE (max.)	600 N (~ 215 Nm)
<b>F<sub>H</sub></b>	Pullout force	3000 N (fastening depended)
	Lever arm	aluminium (RAL9006)
	Connecting cable	non-halogen, grey 5 x 0,5 mm <sup>2</sup> , ~ 3 m
<b>t</b>	Running time (0° – 90°) (constant at 2/3 load)	45 s (2,0%/s)  45 s (2,0%/s)
<b>s</b>	Stroke length (lever)	0 – 93 DEG (± 5%)
<b>L</b>	Length	421 mm
	Potential free contact	max. 24 VDC / 0,5A programmable
	Sound pressure level	≤ 70 dB (A)

ORDER DATA						
s [DEG]	L [mm]	Version	Finish	PU/pcs.	Part.-No.	
0° – 93°	421	FTA600 R S12 24V	E6/C-0	1	<b>524144</b>	
Accessories				PU/pcs.	Part.-No.	
<b>K88</b> Casement bracket FTA600 R				1	<b>524156</b>	
Accessories				PU/pcs.	Part.-No.	
<b>K104</b> Casement bracket FTA600 R				1	<b>524173</b>	

OPTIONS			
Special model	PU/pcs.	Part.-No.	
<b>Drive housing painted/powder coated in other RAL colours</b>			
<b>Lump sum for coating</b>		<b>516030</b>	
Specify at order stage:	1 – 20	<b>516004</b>	
	21 – 50	<b>516004</b>	
	51 – 100	<b>516004</b>	
	from 101	<b>516004</b>	
<b>Microprocessor programming S12</b>			
Electronic stroke reduction 24V S12	1	<b>524190</b>	
Programming drives 24V / 230V S12		<b>524180</b>	
Optional accessories		PU/pcs.	Part.-No.
Configuration module for synchronised multi-drive systems		1	<b>524177</b>


**OPTIONAL ACCESSORIES**

Main control unit and plug solution			
<p><b>M-COM</b></p> 	<p><b>Application</b></p> <p><b>Configuration module</b> for automatic configuration and surveillance of max. 4 opening drives / 2 locking drives version S12 / S3 in synchronised multi-drive systems</p> <p><b>Rated voltage:</b> 24 V DC (19 V ... 28 V)  <b>Current consumption:</b> &lt;12 mA  <b>Drive type:</b> S12  <b>Protection rating</b> IP30 rubber envelope</p>	<p><b>Part.-No. 524177</b></p> <p><b>Ambient temperature range</b> 0 °C ... + 70 °C  <b>Dimensions</b> 45 x 17 x 6 mm  <b>Connecting wires</b> 3 wires 0,5 mm<sup>2</sup> x 50 mm  <b>Feature/Equipment</b> Printed circuit board with components and connection wires to be installed in connection box to be supplied on site</p>	
<p><b>Aumüller-Click plug solution</b></p> 	<p><b>Aumüller-Click plug solution:</b> Unified plug solution for all AUMÜLLER chain drives and AUMÜLLER folding arm drives.</p> <p><b>Rated voltage:</b> 24 V DC (19 V ... 28 V)  <b>Connecting cable:</b> non-halogen, grey 5 x 0,5 mm<sup>2</sup>  <b>Terminal:</b> to 1,5 mm<sup>2</sup></p>	<p><b>Feature/Equipment</b></p> <ul style="list-style-type: none"> <li>• Flexible cable length</li> <li>• Connect multiple drives in series connection</li> <li>• Torsion-plug</li> <li>• Locking hooks prevent withdrawal of the plug under tensile load</li> <li>• Strain relief according DIN EN 60335-1 by screwing the housing halves</li> </ul>	
<b>VARIANTS:</b>			
3 m cable length - 24V DC		<b>Part.-No. 501251</b>	
5 m cable length - 24V DC		<b>Part.-No. 501252</b>	
10 m cable length - 24V DC		<b>Part.-No. 501253</b>	

### OPTIONAL ACCESSORIES

#### Casement bracket

K88

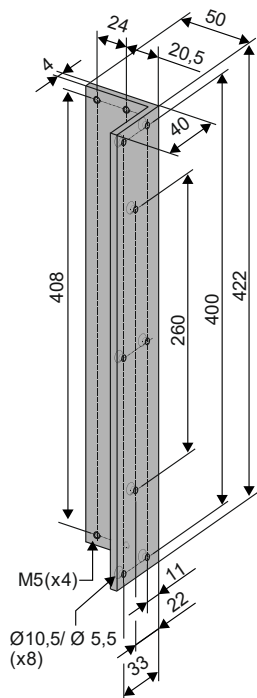

#### Application

**Surface mounting** on the **side closing edge** of frame profiles of inward opening floor-to-ceiling windows as air inlets. Angle bracket **422 mm** for mounting of FTA600-R on the frame profile. Two angle brackets 100 mm for mounting on the floor-to-ceiling windows as sliding guidance of the carrier role, adjustable for compensation of the overlap.

**Part.-No. 524156**

**Material/Finish**  
aluminium

**Feature/Equipment**

1x angle 50x40x422

(t = 4) mm

2x angles 50x75x100

(t = 5) mm



fixing screws and nuts

**Load**


max. 600 N

Special model	PU/pcs.	Part.-No.		
Frame brackets painted / powder coated in other RAL colours				
Lump sum for coating		516030		
Specify at order stage:	1 – 20	516031		
	21 – 50	516031		
	51 – 100	516031		
	from 101	516031		

Typical applications

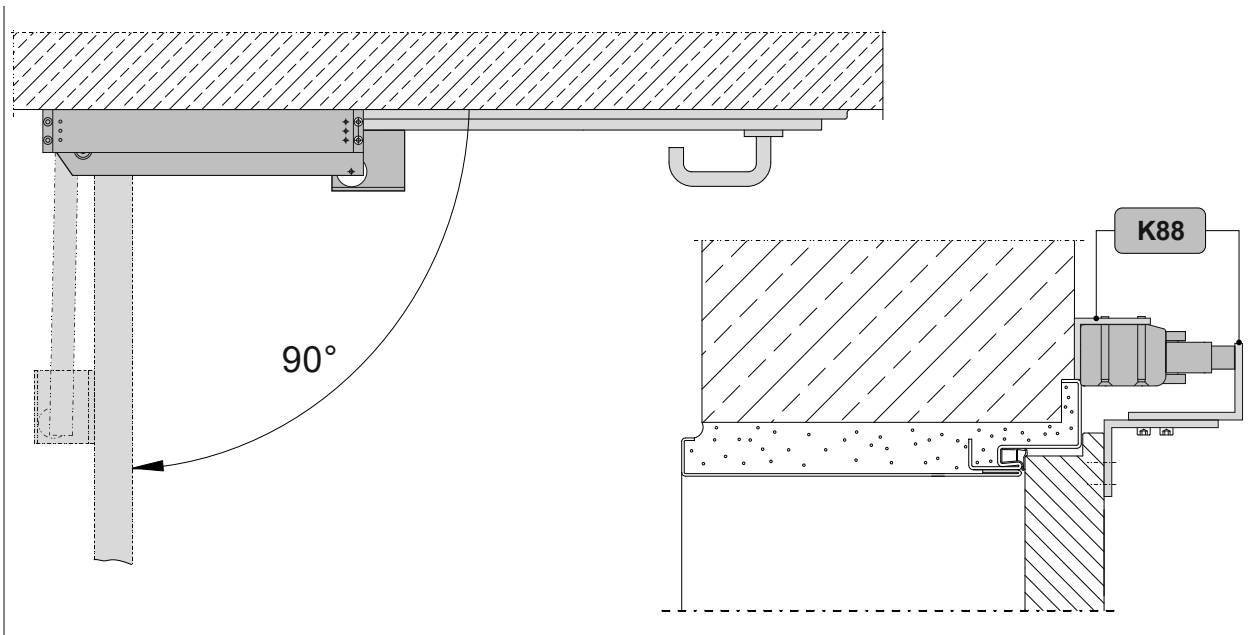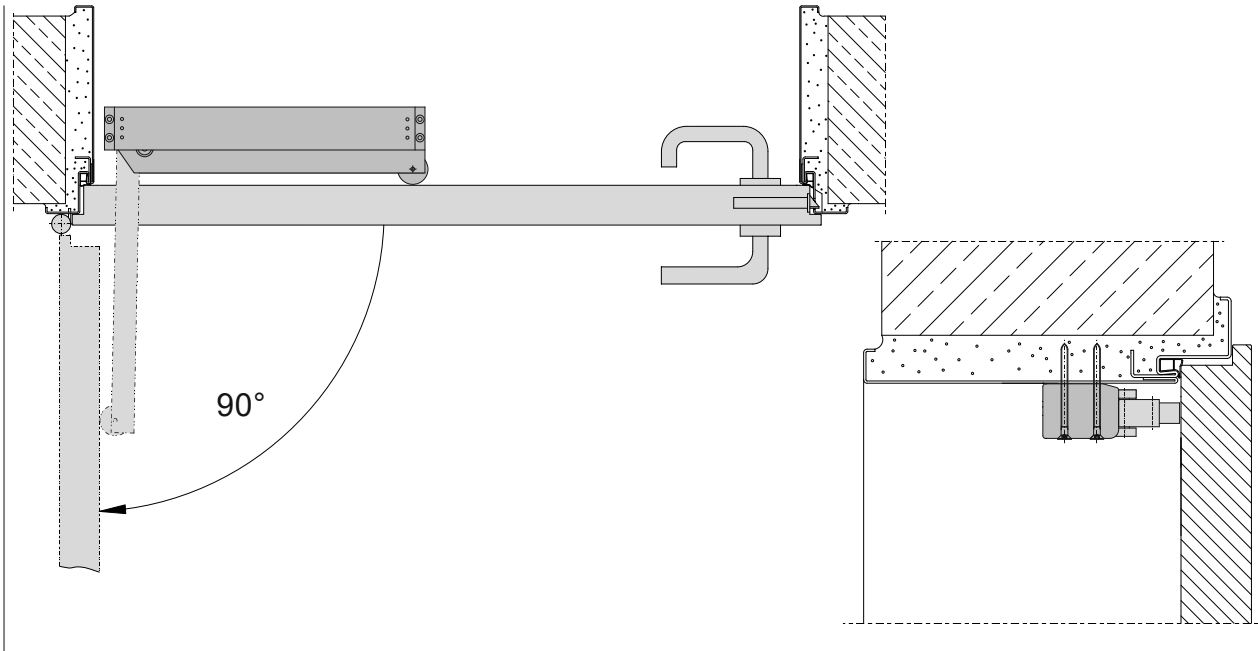

Contact diagramm

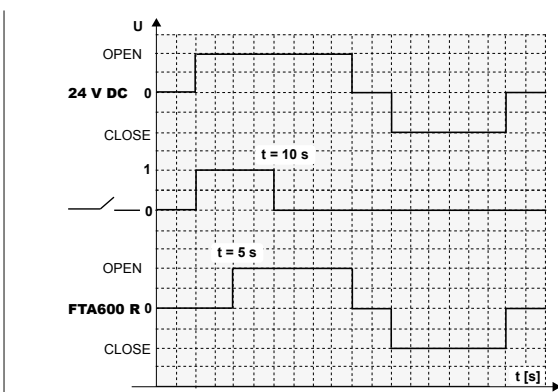


After application of the voltage, the floor-to-ceiling windows lock contact is activated for 10 seconds. With a delay of about 5 seconds, the drive arm of the folding arm drives FTA600 R starts moving and opens to an angle of max. 93°.

During the closing operation, the floor-to-ceiling window lock contact is not activated.

ACCESSORIES

Casement bracket

K104

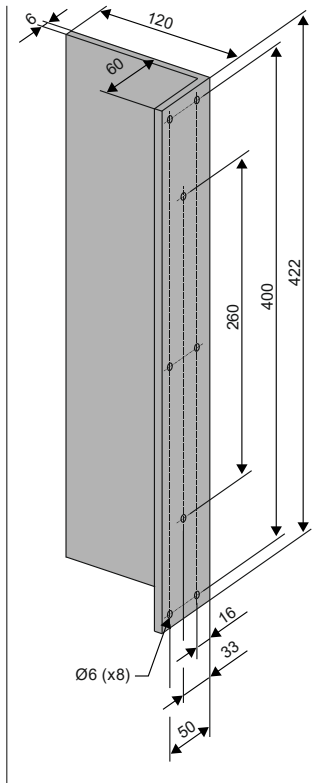

Application

Surface mounting on the side closing edge of window frame profiles of outward opening side-hung doors/windows. Angle bracket 422 mm for mounting of FTA600-R on the door frame profile. The slide rail of has to be mounted on the casement profile.

Part.-No. 524173

Material/Finish aluminium

Feature/Equipment

1x angle 120x60x422 (t = 6) mm  
4x countersunk screws, M5x45 mm

Load

max. 600 N

Special model	PU/pcs.	Part.-No.		
Frame brackets painted / powder coated in other RAL colours				
Lump sum for coating		516030		
Specify at order stage:	1 – 20	516031		
	21 – 50	516031		
	51 – 100	516031		
	from 101	516031		

ATTENTION: Slide rail may not be painted!

Typical applications

