


INSTALLATION AND COMMISSIONING INSTRUCTION REL 65 (Plug-in card)

REL 65 (Plug-in card)

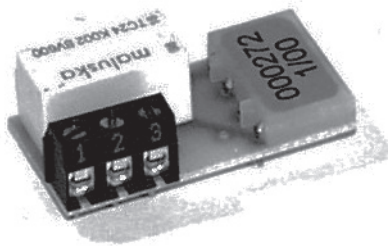

Part.-No.: 650200

Application: Plug-in card for EMB 7300 with relay for forwarding the alarm or fault signal to external devices. With connector for plugging the relay card to the motherboard.

Rated voltage: 24V DC +/- 5%

Ambient temperature range: -5 ... +40 °C

Housing: without, equipped PCB

Dimensions (WxHxD): 20 x 40 x 13 mm

Volt free contac: 1x change-over switch, max. 48 V / 1 A

Connection terminals: 3x 1,5 mm² (rigid wire)

Installation and exchange of relay plug-in card:

Please proceed as follows:

1. First disconnect Control Unit from mains and battery voltage.
2. Carefully insert plug-in card in correct direction and slot.
3. Once correctly inserted, reconnect supply voltage and check for functionality.



Only installation and connect when disconnected from the mains power supply!
Switch off power supply and secure against reconnection!



Warranty claims require proper and professional assembly, installation and maintenance in accordance with national regulations and manufacturer's instructions of the SHEV control unit.

The safety instructions in the supplied product documentation are to be observed.




Strictly observe the information given in this and in the instructions for installation of the SHEV Control Unit, when mounting the **REL 65** (relay plug-in card).

Details can be found on our website
www.aumueller-gmbh.de

Keep this instruction over the lifetime of the product.

Installing relay plug-in card REL 65

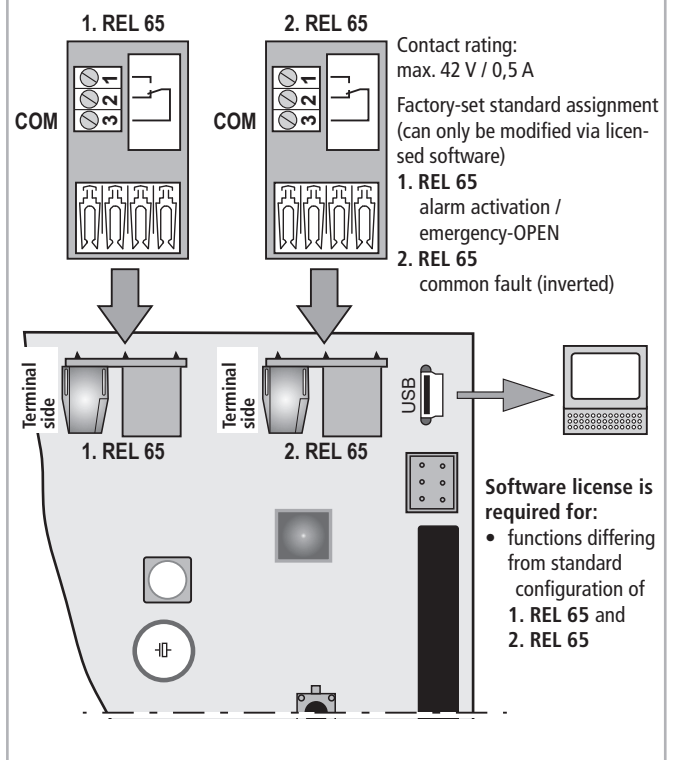

www.aumueller-gmbh.de

AUMÜLLER AUMATIC GMBH

Gemeindewald 11

86672 Thierhaupten

9000023401_V1.1_KW32/20

Tel. +49 8271 8185-0

Fax +49 8271 8185-250

info@aumuelle-gmbh.de